

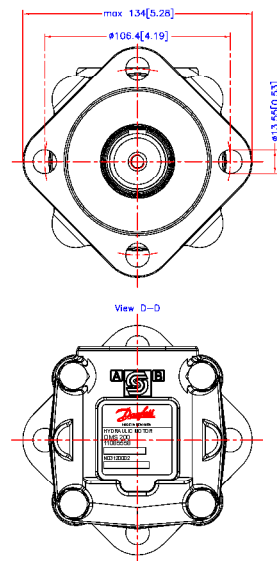


[Reset](#)
[Download 3D Model](#)


Code Number	CCM	* L 1 mm./inch.	* L 2 mm./inch.	* L 3max mm./inch.
151F0500	80	124.1 [4.89]	146.1 [5.75]	max. 168.4 [6.63]
151F0501	100	127.5 [5.02]	149.5 [5.89]	max. 171.8 [6.76]
151F0502	125	131.9 [5.20]	153.9 [6.06]	max. 176.2 [6.93]
151F0503	160	137.9 [5.43]	159.9 [6.30]	max. 182.2 [7.17]
151F0504	200	144.9 [5.70]	166.9 [6.57]	max. 189.2 [7.45]
151F0505	250	153.6 [6.05]	175.6 [6.91]	max. 197.9 [7.80]
151F0506	315	164.9 [6.49]	186.9 [7.36]	max. 209.2 [8.24]
151F0605	400	178.5 [7.03]	200.5 [7.89]	max. 222.8 [8.77]
151F0655	500	178.5 [7.03]	200.5 [7.89]	max. 222.8 [8.77]

C: Drain connection
G 1/4; 12 [0.47] deep
D: M10; 13 [0.51] deep
E: G 1/2; 16 [0.63] deep

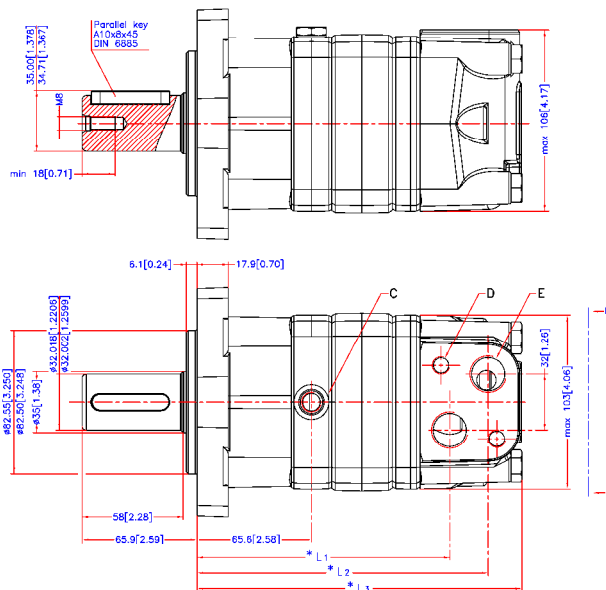

Tolerance for basic dimensions = ± 1 mm (0.04 inch)

Alt.	Rev.	Date	Scale	Projection	Design	Appr.	Drawn	Checked	Rev.
—	—	—	1:1	—	ASJ	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—

OMS
ø32 cyl.
No. 8_15100560