


Air/oil coolers series CSA 7



Code	Tension V	Frequency Hz	Rpm	Power Kw	Dia.Fan Weel.	dB (A)	K mm.
CSA 7.38.0.00	230/400	50	1400	0.90	560	78	400
CSA 7.G2.0.00	Prepared for Gr2 Hydraulic Motor		1340	=	560	=	390
CSA 7.GD.0.00	Prepared for Gr2 Hydraulic Motor		800/1700	=	560	=	390

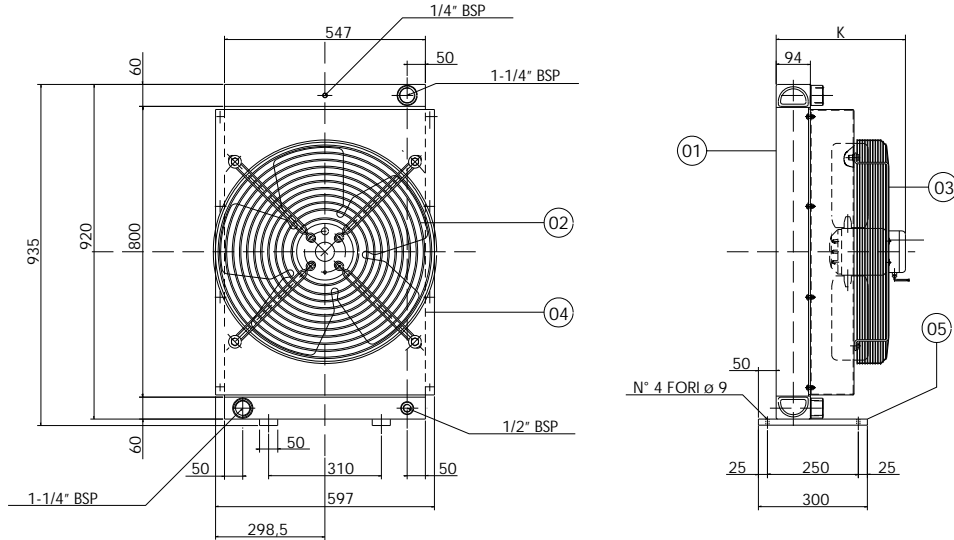


COOLER TECHNICAL DATA		FAN MOTORS TECHNICAL DATA	
Max working Pressure	:20 bar	Tension	CA: DIN IEC38 DC: 12/24V
Max working Temperature	: + 120° C	Max Working Temperature	: + 75° C + 75° C
Max oil Viscosity	: 100 CST	Min Working Temperature	: - 30° C
Main Material	: Alluminium	Main Material	: Steel : Fiber Glass
Cooling Fluid	: Compatible Al	Motor Protection	: IP 44 : IP 64
Colour	: Black	Colour	: Black

SPARE PARTS


SPARE PARTS

Pos.	Description	Code	Pos.	Description	Code
CSA 7.38.0.00			CSA 7.G2.0.00		
01	Cooler	CSA7.00.0.00	01	Cooler	CSA7.00.0.00
02	Fan Motor(Air Flow Suction)	10.70021 .1	02	Fan Motor(Fan Motor Suction)	10.70037 .1
02	Fan Motor(Air Flow Blowing)	10.70022 .1	02	Fan Motor(Fan Motor Blowing)	10.70037 .1
03	Safety Guard	10.70060 .1	03	Safety Guard	10.70065 .1
04	Cowl	15.65014 .0	04	Cowl	15.65014 .0
05	Fixing Support	15.65017 .0	05	Fixing Support	15.65017 .0
CSA 7.GD.0.00					
01	Cooler	CSA7.00.0.00			
02	Fan Motor(Air Flow Suction)	10.70037 .1			
02	Fan Motor(Air Flow Blowing)	10.70037 .1			
03	Safety Guard	10.70070 .1			
04	Cowl	15.65013 .0			
05	Fixing Support	15.65017 .0			


THERMIC EFFICIENCY DIAGRAM

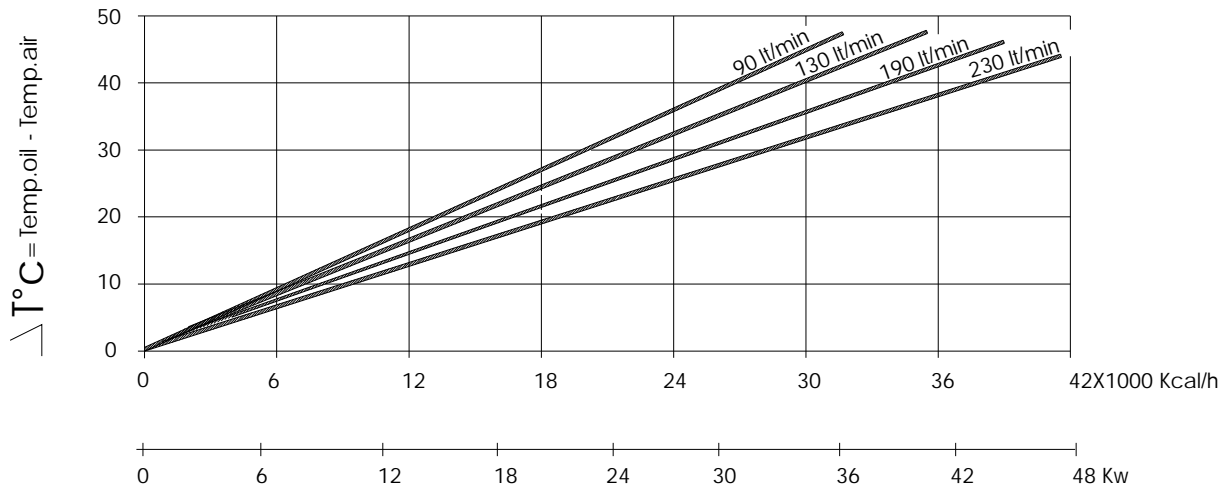

PRESSURE DROP DIAGRAM

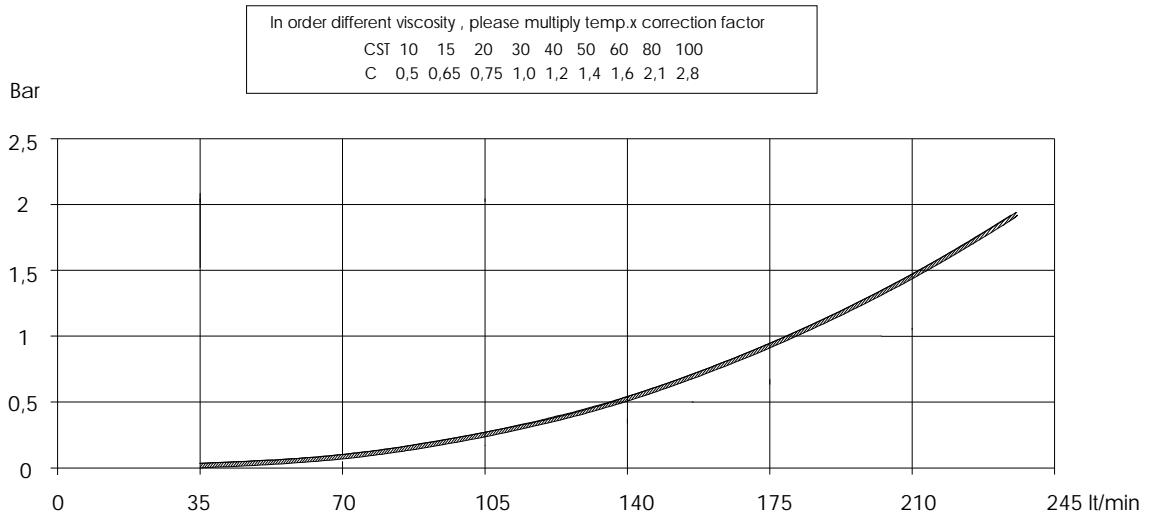

CODIFICATION

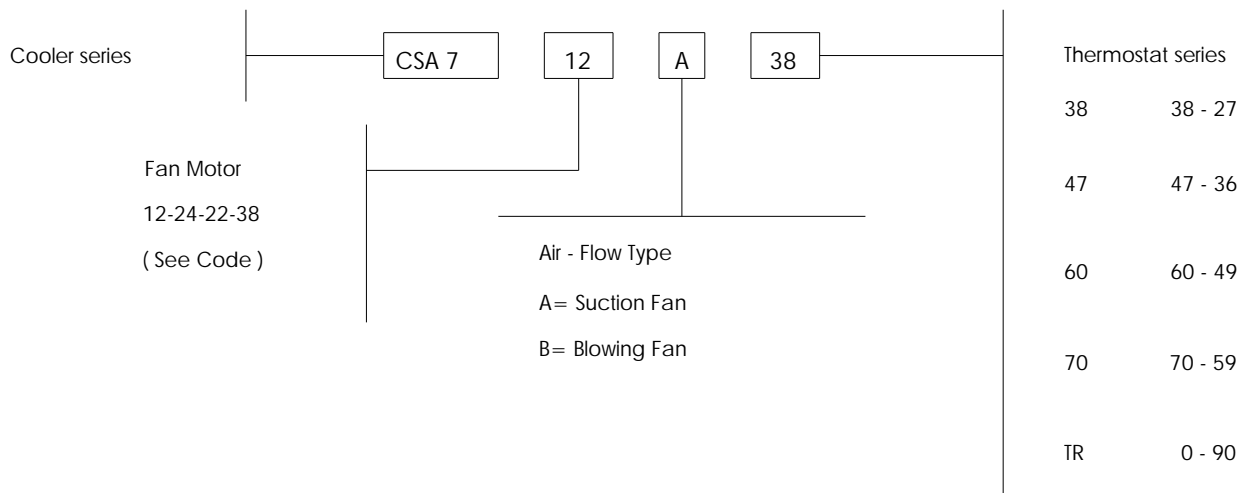

Technical characteristic herein mentioned are not binding and it can be modified from CIESSE without any notice