




LEHENGOTEK, S.A.



CUR2615

Valvole unidirezionali
Check valves




LEHENGOTEK, S.A.




Dati tecnici Technical data

Viscosità fluido Fluid viscosity	10-500 mm ² /s 45 to 2000 ssu (6 to 420 cSt)
Classe di contaminazione Filtration	ISO code 16/13 SAE class 4 or better
Temperatura fluido Fluid temperature	-20°C +80°C -4°F +176°F
Temperatura ambiente Ambient temperature	-20°C +50°C -4°F +122°F

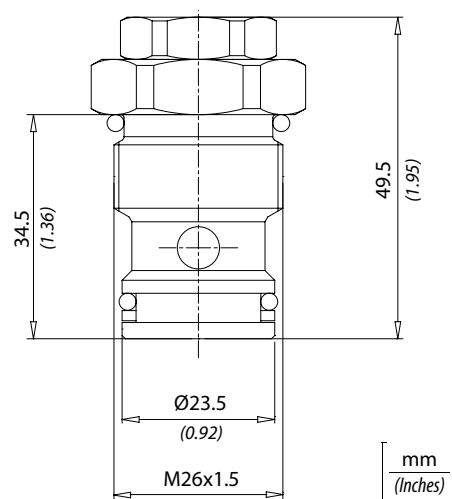


Perdite di carico
Pressure drops

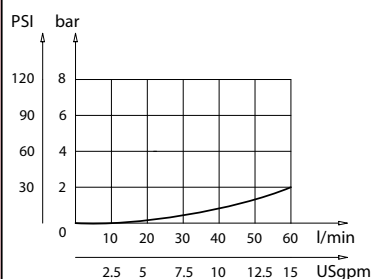

Caratteristiche tecniche Technical performances

Codice Code	Portata Max Max flow l/min - USgpm	Pressione Max Max pressure bar/PSI	Peso approssimativo Approx weight Kg / lb	Coppia di serraggio Tightening torque Nm / lbf ft	Cavità Cavity
CUR2615	60 (15)	350 (5000)	0,17 (0.38)	55-60 (41-45)	C2615/2

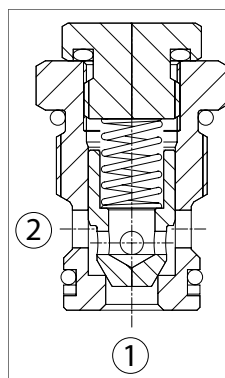

Codice ordinazione Ordering code

CUR2615 - X - Y

X	Tenuta - Sealing	Y	Molla / Spring
SP	Tenuta a otturatore Poppet sealing	1	1 bar (15 PSI)