



Zertifiziertes
QM-System
DIN EN ISO 9001
Zertifikat-Nr. 01017

Turbine Wheel Flow Meter for Liquids



measuring
•
monitoring
•
analysing



LEHENGOTAK, S. A.

DPE



- Measuring ranges:
5 - 30 ... 50 - 750 L/min water
- Measuring accuracy:
 $\pm 2.5\%$ of full scale
- p_{max} : PN 40, t_{max} : 80 °C
- Connection: G 1/2 ... G 3 female
1/2 NPT ... 3 NPT female

Weld-on sleeves:
DN 25 ... DN 80

- Werkstoff:
aluminum bronze, stainless steel
- Viscosity range:
low viscous
- Output:
pulses, 4 - 20 mA,
LED display, contacts



LEHENGOTAK, S. A.

Description

The KOBOLD flow meter model DPE is used for measuring and monitoring liquids. The device works according to the well-known blade wheel principle. The six vane blade wheel is retained axially in a high-quality sapphire bearing. The sensor is supplied ready-to-install with pipe fittings or with weld-on sleeves.

The blade wheel is set in motion by the flowing medium. Magnets are embedded hermetically sealed in the ends of the blade wheels. The magnets generate electrical pulses in a Hall-effect sensor mounted outside the flow area.

Fields of application

- cooling water monitoring
- general mechanical engineering
- waste water treatment
- all heavy goods industry
- chemical industry

Technical details

Measuring accuracy:	±2.5 % of full scale
Process temperature:	max. 80 °C
Ambient temperature:	max. 80 °C
Max. operating pressure:	PN40 / 20 °C
Max. pressure loss:	DPE-...05: 0.05 bar DPE-...10, ...15: 0.03 bar DPE-...20: 0.04 bar DPE-...25: 0.02 bar DPE-...30: 0.01 bar
Protection:	IP65

Materials

Housing:	aluminium bronze stainless steel 1.4581
Seals:	aluminium bronze version: NBR Stainless steel version: FPM
Turbine wheel:	PVDF
Axle:	hard metal
Bearing:	sapphire

Electronics

- **Frequency output (..F300)**
Power supply: 12-28 V_{DC}
Power consumption: 10 mA
Pulse output: PNP, open collector, max. 25 mA
Electr. connection: plug connector M12x1
- **Frequency output with frequency divider**
Power supply: 24 V_{DC} ± 20 %
Power consumption: 15 mA
Pulse output: PNP, open collector, max. 25 mA
Electr. connection: plug connector M12x1
Division ratio: 1...1/128, factory set
- **Analogue output (plug-on display option)**
Power supply: 24 V_{DC} ± 20 %
Output: 0-20 mA or 4-20 mA,
2- or 3-wire
Max. load: 500 Ω
Electr. connection: plug connector M12x1 or DIN 43 650
Option: plug-on display (with plug connector DIN 43 650 and 4-20 mA output only)


Compact electronics

Display:	3-digit LED
Analogue output:	(0)4...20 mA adjustable, max. 500 Ω
Switching outputs:	1 (2) semiconductor PNP or NPN, factory set
Contact operation:	N/C / N/O contact, frequency programmable with 2 buttons
Setting:	24 V _{DC} ± 20 %, 3-wire, approx. 100 mA
Supply:	24 V _{DC} ± 20 %, 3-wire, approx. 100 mA
Electr. connection:	plug connector M12x1

Pointer indicator with analogue output

Housing:	aluminium
Display:	moving-coil instrument, 240° display
Power supply:	24 V _{DC} ± 20 %
Output:	0-20 mA or 4-20 mA, 3-wire
Max. load:	250 Ω
Electr. connection:	plug connector M12x1

ADI electronics

Display:	bar graph and 5-digit digital display
Analogue output:	(0)4...20 mA, 0-10 V _{DC}
2 switching outputs:	relay /changeover contact, max. 250 V _{AC} /5 A resistive load, max. 30 V _{DC} / 5 A
Setting:	via 4 buttons
Supply:	100...240 V _{AC} ± 10 % or 18...30 V _{AC} / 10...40 V _{DC}
Electr. connection:	pluggable terminal block via cable gland

DPE-...Exxx (Counter electronic)

Display:	LCD, 2 x 8 digit, illuminated total, part and flow quantities, units selectable
Analogue output:	0(4)...20 mA adjustable
Load:	max. 500 Ω
Switching outputs:	2 relays, max. 250 V/5 A/1000 VA
Settings:	via 4 buttons
Functions:	Reset, MIN/MAX memory, flow monitor, monitoring for part and total quantity, language
Supply:	24 V _{DC} ± 20 %, 3-wire
Power consumption:	approx. 170 mA
Electr. connection:	pluggable screw terminals via cable gland

DPE-...Gxxx (Dosierelektronik)

Display:	LCD, 2 x 8 digit, illuminated total, part and flow quantities, units selectable
Analogue output:	0(4)...20 mA adjustable
Load:	max. 500 Ω
Switching outputs:	2 relays, max. 250 V/5 A/1000 VA
Settings:	via 4 buttons
Functions:	dosing (relay S2), start, stop, reset, fine dosing, correction amount, flow switch, total quantity, language
Supply:	24 V _{DC} ± 20 %, 3-wire
Power consumption:	approx. 170 mA
Electr. connection:	pluggable screw terminals via cable gland

See brochure Z2 for more technical details on ADI evaluating electronics.



Order Details (Example: DPE-1105 G4 F300)

With pipe fittings							Evaluating electronics			
Measuring range max. 3 m/s		Flow rate max. 10 m/s approx.	Model		Connection		Frequency output			
[L/min water]	approx. Frequenz [Hz] at FS	[L/min water]	Material aluminium bronze	Material st. steel	Standard female	Sonder female				
5-30	80	100	DPE-1105..	DPE-1205..	..G4.. = G 1/2	..N4.. = 1/2 NPT	..F300 = frequency output, plug connector M12 x 1 ..F320 = frequency divider 1: 2, plug connector M12 x 1 ..F340 = frequency divider 1: 4, plug connector M12 x 1 ..F390 = frequency divider 1... 1/128, plug connector M12x 1 Analogue output ..L303 = 0-20 mA output, 3-wire, M12 x 1 plug connector ..L342 = 4-20 mA output, 2-wire, M12 x 1 plug connector ..L343 = 4-20 mA output, 3-wire, M12 x 1 plug connector ..L442 = 4-20 mA output, 2-wire, plug connector DIN 43 650 Compact electronic* ..C30R = LED display, 2 x open collector, PNP, plug connector M12 x 1 ..C30M = LED display, 2 x open collector, NPN, plug connector M12 x 1 ..C34P = LED display, 4-20 mA, 1 x open collector PNP, plug connector M12 x 1 ..C34N = LED display, 4-20 mA, 1 x open collector NPN, plug connector M12 x 1 Pointer indication, 240°* ..Z300 = 240°-pointer indication, 0-20 mA, plug connector M12x1 ..Z340 = 240°-pointer indication, 4-20 mA, plug connector M12x1			
10-50	80	180	DPE-1110..	DPE-1210..	..G5.. = G 3/4	..N5.. = 3/4 NPT				
20-80	65	230	DPE-1115..	DPE-1215..	..G6.. = G 1	..N6.. = 1 NPT				
25-250	140	600	DPE-1120..	DPE-1220..	..G8.. = G 1 1/2	..N8.. = 1 1/2 NPT				
30-350	135	1000	DPE-1125..	DPE-1225..	..G9.. = G 2	..N9.. = 2 NPT				
50-750	110	1600	DPE-1130..	DPE-1230..	..G9.. = G 3	..NB.. = 3 NPT				
With installation adapter not available with compact / ADI electronics							ADI electronics*			
Meas. range [m/s]	approx. Frequenz [Hz] at max. value	max. flow rate [m/s]	Material aluminium bronze	Material st. steel	Connection for nominal pipe size		Display	Supply	Output	Contacts
0-3	65 (at DN 25) 140 (at DN 40) 135 (at DN 50) 110 (at DN 80)	10	-	DPE-1200..	..W6.. = DN 25 ..W8.. = DN 40/DN 50 ..WB.. = DN 8		K = bar graph/digital display	0 = 100-230 V _{AC/DC} 3 = 18-30V _{AC} , 10-40 V _{DC}	0 = without 4 = 0(4)-20 mA, 0-10V	2 = 2 change-over contacts

* Please specify flow direction in writing.

Plug-on display

for model DPE...L442 (with 4-20 mA output and DIN connector)

Description	Order number
4-digit LED, connector DIN 43650, 2-wire, supply through analogue output	AUF-1000
as above however with additional open collector output	AUF-1001

Weights


Sensor

Electronics


Model	Weight	Model	Weight
1/2"	approx. 750 g	Frequency output	130 g
3/4"	approx. 1050 g	Analogue output	130 g
1"	approx. 900 g	Compact electronic	approx. 650 g
1 1/2"	approx. 1200 g	Pointer indication	550 g
2"	approx. 1500 g	ADI electronics	1400 g
3"	approx. 3000 g	E/G electronics	1400 g

Electrical connection


DPE-..F., DPE-..Z., DPE-..L3..3-wire




DPE-..C..

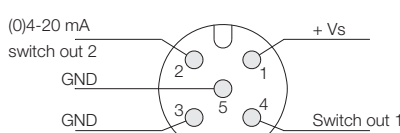


DPE-..L342 2-wire



DPE-..L442



- 14 — Control 1
- 13 — Control 1 - GND
- 12 — Control 2
- 11 — Control 2 - GND
- 10 — Sensor supply
- 9 — Analog GND
- 8 — Analog 10 V
- 7 — Analog 20 mA
- 6
- 5
- 4 — GND
- 3 — f-Input Namur
- 2 — f-Input NPN
- 1 — f-Input PNP







urbine Wheel Flow Meter Model DPE

Dimensions

Model: DPE-..W.. (with weld-on sleeve)

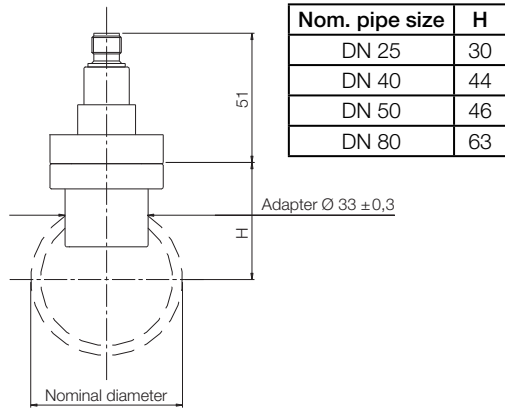


Model: DPE-...L3.. / DPE-..F.. (with analogue output)

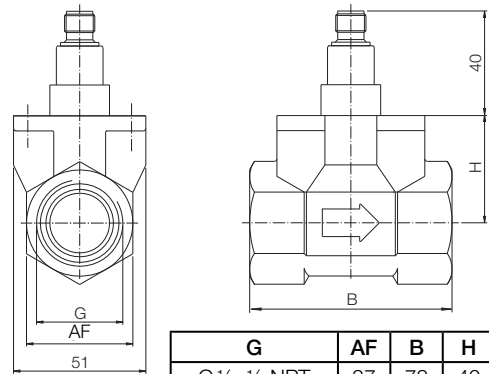


Model: DPE-..L4..

(with analogue output and plug-on display option)

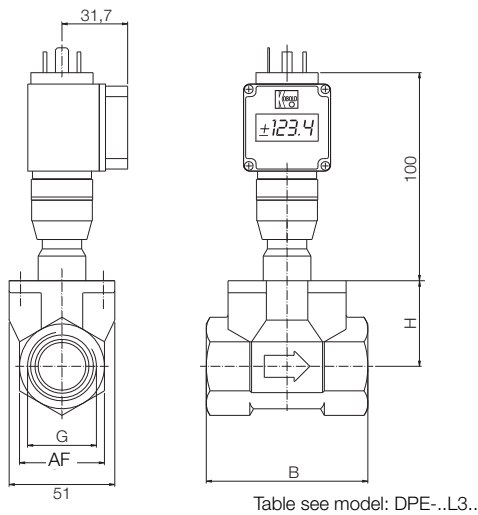


Model: DPE-..C.. (with compact electronic)

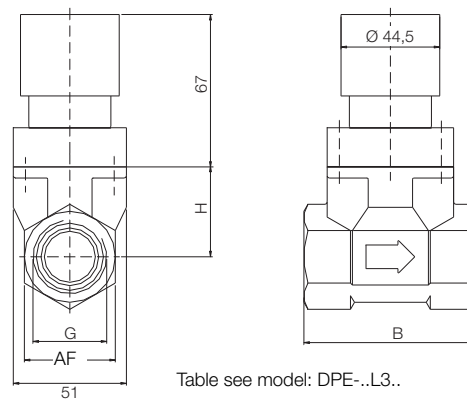

Model: DPE-..K.., ..G.., ..E..

(with ADI evaluating, counter or dosing electronic)

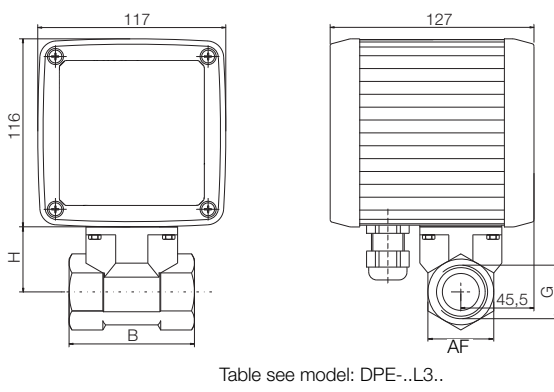

Model: DPE-...Z.. (with pointer indication)

