

ISI GF



VAPOR




TUBO: Caucho EPDM.

REFUERZO: Hilos sintéticos de alta resistencia.

EXTERIOR: Caucho de EPDM y fibra de vidrio resistente hasta 600 C° de temperatura.

USO: Para descargas de agua en ambientes con altas temperaturas como acerías, fundiciones, etc...

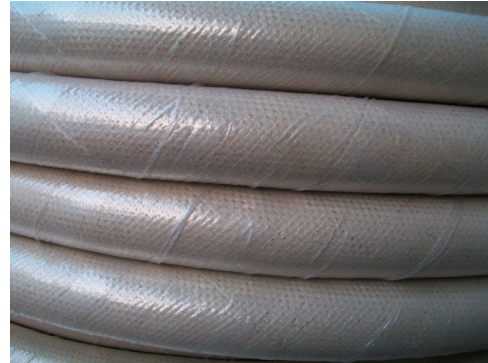

mm	mm	bar	bar	bar	mm	g/m	mts.
13	21,5	10	30			354	40
16	25	10	30			415	40
19	28	10	30			482	40
25	34	10	30			600	40
32	42	10	30			817	40
35	46	10	30			950	40
38	50	10	30			1170	40
45	57	10	30			1385	40
50	63,5	10	30			1640	40

TEMPERATURA EXTERIOR 600° C



-40°C / +125°C
-40°F / +257°F

OTROS COLORES Y DIAMETROS DISPONIBLES BAJO PEDIDO

POSIBILIDAD DE CORTE A MEDIDA

NORMA	ISO 1307	COLOR	
-------	----------	-------	--

