

► **Multiconnection Multifaster M204 series**

The Multiconnection **M204 series** has been purposely designed and developed for mobile refrigeration systems on vehicles. Two lines 3/8" size and 3/4" size connect the refrigeration system, two electrical connections 3 and 7 poles connect the safety and control systems, while the heaters integrated on the plate, prevent ice and frost when Multifaster is working.




Patent
Applications
Pending

NEW **MULTIFASTER**
M204 SERIES



► **Technical data**

Coupling size	3/8" (06) 3/4" (12)
Working pressure connected	14,3 MPa (2074 PSI)
Working pressure male part	8 MPa (1160 PSI)
Working pressure female part	3,5 MPa (508 PSI)
Spillage (for each coupling)	3/8": 0.05 cc max – 3/4": 0.1 cc max
Air inclusion	3/8": 0.05 cc max – 3/4": 0.1 cc max
Working temperature	from -50°C (-58°F) to +140°C (+284°F)
Seals	EPDM Peroxide for low temperature
Heaters Power	2x75 Watt (max. voltage 24 Volt)

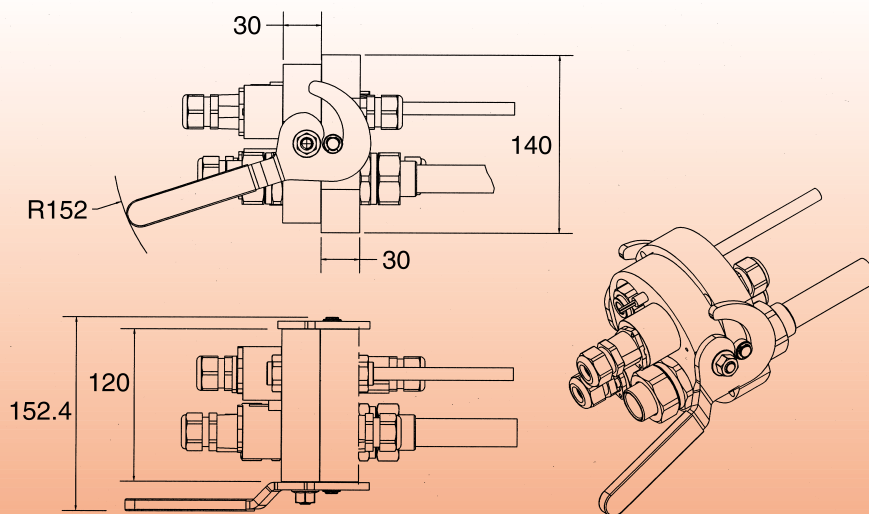

Images refer to one possible configuration. For further details please contact **Faster Technical Dept.**

► **Quick-release couplings for Multiconnection M204 series (brazing adaptors)**

❖	Female coupling	Male coupling	Ø Hole brazing adaptor	Seals material	Adaptor tightening torque Nm
06	KIT RFB06 TS100 FX	KIT RFP06 TS100 MX	10 mm.	EPDM X	20 ⁺⁵ / ₋₀
12	KIT RFB12 TS220 FX	KIT RFP12 TS220 MX	22.4 mm.	EPDM X	20 ⁺⁵ / ₋₀

❖ Size