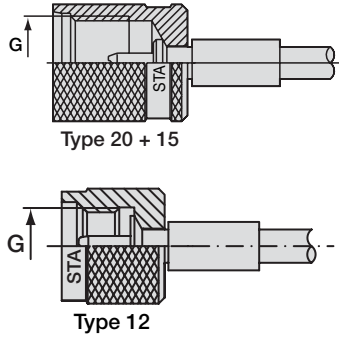
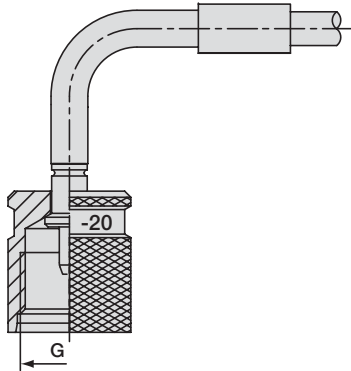

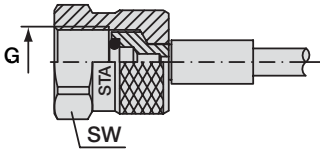
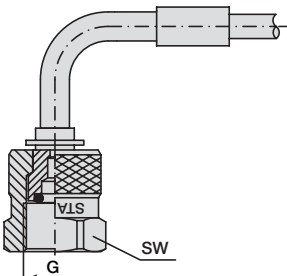
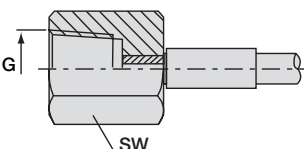


TEST

Description	Hose end	Type	G	SW		Nominal Bore Hose DN
				mm	in	
<b>STAUFF-TEST Screw-type</b> Suitable for test points	 <p>Type 20 + 15</p> <p>Type 12</p>		20	M16 x 2		2 and 4
			15	M16 x 1,5		
			12	S 12,65 x 1,5		
<b>STAUFF-TEST Screw-type 90° elbow</b> Suitable for test points		O	20	M16 x 2		2
			15	M16 x 1,5		
			12	S 12,65 x 1,5		
<b>STAUFF-TEST Plug in-type</b>			10	Plug in system		2
<b>Gauge adapter BSP-thread</b> for G 3/8 and G 1/2 BSP is similar to swivel nut type N		M	1/4	G 1/4	19 / 0.75	2 and 4
			1/2	G 1/2	27 / 1.06	
			3/8	G 3/8	22 / 0.87	2
<b>90° elbow gauge adapter BSP-thread</b> for G 3/8 and G 1/2 is similar to swivel nut type N		W	1/4	G 1/4	19 / 0.75	2 and 4
			1/2	G 1/2	27 / 1.06	
<b>Gauge adapter NPT-thread</b>		N	1/4	1/4 NPT	19 / 0.75	2
			1/2	1/2 NPT	27 / 1.06	

Description	Hose end	Type	G	SW		Nominal Bore Hose DN		
				mm	in			
90° elbow gauge adapter NPT-thread		A	1/4	1/4 NPT	19	0.75	2 and 4	
			1/2	1/2 NPT	27	1.06		
Standpipe according to DIN 2353		S	4	4 LL			2	
			6	6 L – 6 S			2/4	
			8	8 L – 8 S			2/4	
			10	10 L – 10 S			2/4	
			12	12 L – 12 S			2	
			15	15 L			2	
Standpipe according to DIN 2353 90° elbow		on request					2 and 4	
Seal with O-ring for 24° cone fitting according to DIN 2353 c/w swivel nut		K	6 LL	M10 x 1,0	12	0.47	4	
			6 L	M12 x 1,5	14	0.55	2/4	
			8 L	M14 x 1,5	17	0.67	2/4	
			10 L	M16 x 1,5	19	0.75	2/4	
			12 L	M18 x 1,5	22	0.87	2/4	
			6 S	M14 x 1,5	17	0.67	2/4	
			8 S	M16 x 1,5	19	0.75	2/4	
			10 S	M18 x 1,5	22	0.87	2/4	
			12 S	M20 x 1,5	24	0.94	2/4	
Seal with O-ring for 24° cone fitting according to DIN 2353 c/w swivel nut 45° elbow		R	6 S	M14 x 1,5	17	0.67	2 and 4	
Seal with O-ring for 24° cone fitting according to DIN 2353 c/w swivel nut 90° elbow		L	6 L	M12 x 1,5	14	0.55	2 and 4	
			8 L	M14 x 1,5	17	0.67		
			10 L	M16 x 1,5	19	0.75		
			6 S	M14 x 1,5	17	0.67		
			8 S	M16 x 1,5	19	0.75		
			10 S	M18 x 1,5	24	0.95		

Description	Hose end	Type	G	SW		Nominal Bore Hose DN	
				mm	in		
<b>Male thread</b> according to DIN 3852		<b>G</b>	<b>12</b>	M12 x 1,5	17	<b>0.67</b>	2 and 4
			1/8	G 1/8	14	<b>0.55</b>	
			1/4	G 1/4	19	<b>0.75</b>	
			1/2	G 1/2	27	<b>1.06</b>	
<b>Male thread NPT</b> according to ANSI-Norm		<b>F</b>	1/8	1/8 NPT	13	<b>0.51</b>	
			1/4	1/4 NPT	17	<b>0.67</b>	
<b>Male thread</b> for 24° cone fitting according to DIN 3852		<b>C</b>	<b>6 L</b>	M12 x 1,5	14	<b>0.55</b>	
			<b>8 L</b>	M14 x 1,5	17	<b>0.67</b>	
			<b>6 S</b>	M14 x 1,5	17	<b>0.67</b>	
			<b>8 S</b>	M16 x 1,5	17	<b>0.67</b>	
<b>Male thread</b> according to SAE J 514		<b>J</b>	1/4	7/16 - UNF	14	<b>0.55</b>	
			5/16	1/2 - UNF	14	<b>0.55</b>	
			3/8	9/16 - UNF	17	<b>0.67</b>	
<b>Universal sealing head</b> with swivel nut for 24° cone fitting according to DIN 2353		<b>D</b>	<b>6 L</b>	M12 x 1,5	14	<b>0.55</b>	
			<b>8 L</b>	M14 x 1,5	17	<b>0.67</b>	
			<b>10 L</b>	M16 x 1,5	19	<b>0.75</b>	
			<b>12 L</b>	M18 x 1,5	22	<b>0.87</b>	
			<b>6 S</b>	M14 x 1,5	17	<b>0.67</b>	
			<b>8 S</b>	M16 x 1,5	19	<b>0.75</b>	
			<b>10 S</b>	M18 x 1,5	22	<b>0.87</b>	
<b>Universal sealing head</b> with swivel nut for 24° cone fitting according to DIN 2353 90° elbow		<b>Q</b>	<b>10 L</b>	M16 x 1,5	19	<b>0.75</b>	
			<b>10 S</b>	M18 x 1,5	22	<b>0.87</b>	
<b>Sealing head</b> with swivel nut for cone fitting according to DIN 8542		<b>B</b>	1/4	G 1/4	17	<b>0.67</b>	
<b>Sealing head</b> with swivel nut according to SAE J 514 37° cone		<b>U</b>	1/4	7/16 - 20 UNF	14	<b>0.55</b>	
			5/16	1/2 - 20 UNF	17	<b>0.67</b>	
			3/8	9/16 - 18 UNF	19	<b>0.75</b>	
<b>Sealing head</b> with swivel nut according to SAE J 514 f 45° cone		<b>UR</b>	1/4	7/16 - 20 UNF	14	<b>0.55</b>	

Description	Hose end	Type	G	SW		Nominal Bore Hose DN	
				mm	in		
Sealing head with swivel nut according to SAE J 514 37° cone 90° elbow		E	1/4	7/16 - 20 UNF	14	0.55	2
Sealing head with swivel nut according to SAE J 514 f 45° cone 90° elbow		ER	1/4	7/16 - 20 UNF	14	0.55	2
Test hose for air brake systems		P	2	M 16 x 1,5	19	0.75	2
Sealing head with swivel nut 60° cone		H	1/4	G 1/4	17	0.67	4
Screw-type ORS according to SAE J 1453		T	11/16	11/16 - 16 UN	21	0.83	2
Screw-type ORS according to SAE J 1453 90° elbow		V	11/16	11/16 - 16 UN	21	0.83	2 and 4