

## Gerade Einschraubverschraubungen


Einschraubgewinde: Whitworth-Rohrgewinde - zylindrisch

## Straight connectors, male

Stud thread: BSP thread - parallel

## Racores para roscar rectos

Rosca de conexión: Rosca Whitworth para tubos - cilíndrica

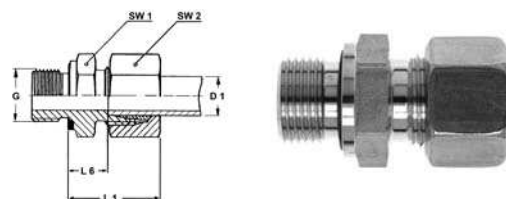

### GEV-..LR-WD

Type	Mat.-Nr.	Serie	PN	D1	G	L1	L6	SW1	SW2	g/Stk
GEV-04LLR 1.8 WD	708.1171.060.10	LL	100	4	1/8	20.0	11.0	14	10	15
GEV-06LLR 1.8 WD	708.1171.100.10	LL	100	6	1/8	20.0	8.0	14	12	19
GEV-08LLR 1.8 WD	708.1171.160.10	LL	100	8	1/8	21.0	9.0	14	14	20
● GEV-06LR 1.8 WD	708.1171.100.20	L	315	6	1/8	23.0	8.5	14	14	25
GEV-06LR 1.4 WD	708.1171.110.20	L	315	6	1/4	24.5	10.0	19	14	40
GEV-06LR 3.8 WD	708.1171.120.20	L	315	6	3/8	26.0	11.5	22	14	58
GEV-06LR 1.2 WD	708.1171.125.20	L	315	6	1/2	26.5	12.0	27	14	100
GEV-08LR 1.8 WD	708.1171.160.20	L	315	8	1/8	23.5	8.5	14	17	32
● GEV-08LR 1.4 WD	708.1171.170.20	L	315	8	1/4	25.0	10.0	19	17	43
GEV-08LR 3.8 WD	708.1171.180.20	L	315	8	3/8	26.0	11.5	22	17	59
GEV-08LR 1.2 WD	708.1171.185.20	L	315	8	1/2	26.5	12.0	27	17	99
GEV-10LR 1.8 WD	708.1171.265.20	L	315	10	1/8	25.5	11.5	17	19	43
● GEV-10LR 1.4 WD	708.1171.270.20	L	315	10	1/4	26.0	12.0	19	19	50
GEV-10LR 3.8 WD	708.1171.280.20	L	315	10	3/8	27.5	12.5	22	19	64
GEV-10LR 1.2 WD	708.1171.285.20	L	315	10	1/2	29.0	14.0	27	19	102
GEV-12LR 1.8 WD	708.1171.375.20	L	315	12	1/8	25.5	10.5	19	22	54
GEV-12LR 1.4 WD	708.1171.380.20	L	315	12	1/4	26.0	11.0	19	22	62
● GEV-12LR 3.8 WD	708.1171.390.20	L	315	12	3/8	27.5	12.5	22	22	70
GEV-12LR 1.2 WD	708.1171.400.20	L	315	12	1/2	28.0	13.0	27	22	101
GEV-12LR 3.4 WD	708.1171.405.20	L	315	12	3/4	31.0	12.0	32	22	102
GEV-15LR 1.4 WD	708.1171.528.20	L	315	15	1/4	28.0	13.0	24	27	98
GEV-15LR 3.8 WD	708.1171.532.20	L	315	15	3/8	28.5	13.5	24	27	102
● GEV-15LR 1.2 WD	708.1171.534.20	L	315	15	1/2	29.0	14.0	27	27	114
GEV-15LR 3.4 WD	708.1171.536.20	L	315	15	3/4	30.0	15.0	32	27	172
GEV-18LR 3.8 WD	708.1171.644.20	L	315	18	3/8	31.0	14.5	27	32	136
● GEV-18LR 1.2 WD	708.1171.646.20	L	315	18	1/2	31.0	14.5	27	32	142
GEV-18LR 3.4 WD	708.1171.648.20	L	315	18	3/4	31.0	14.5	32	32	185
GEV-22LR 1.2 WD	708.1171.764.20	L	160	22	1/2	33.0	16.5	32	36	200
● GEV-22LR 3.4 WD	708.1171.768.20	L	160	22	3/4	33.0	16.5	32	36	196
GEV-22LR 1.1 WD	708.1171.770.20	L	160	22	1	34.0	17.5	41	36	289
GEV-22LR 5.4 WD	708.1171.771.20	L	160	22	1 1/4	34.0	17.5	50	36	368
GEV-28LR 1.2 WD	708.1171.840.20	L	160	28	1/2	33.0	17.5	41	41	264
GEV-28LR 3.4 WD	708.1171.845.20	L	160	28	3/4	33.0	17.5	41	41	270
● GEV-28LR 1.1 WD	708.1171.850.20	L	160	28	1	34.0	17.5	41	41	270
GEV-28LR 5.4 WD	708.1171.860.20	L	160	28	1 1/4	35.0	18.5	50	41	432

Fortsetzung nächste Seite

Continued on next page

Continuación página próxima



# LEHENGOMAK, S. A.

## Gerade Einschraubverschraubungen


Einschraubgewinde: Whitworth-Rohrgewinde - zylindrisch

### Straight connectors, male

Stud thread: BSP thread - parallel

### Racores para roscar rectos

Rosca de conexión: Rosca Whitworth para tubos - cilíndrica



## GEV-..LR-WD

Type	Mat.-Nr.	Serie	PN	D1	G	L1	L6	SW1	SW2	g/Stk
GEV-35LR 1.2 WD	708.1171.920.20	L	160	35	1/2	37.0	17.5	46	50	350
GEV-35LR 3.4 WD	708.1171.915.20	L	160	35	3/4	38.0	17.5	46	50	400
GEV-35LR 1.1 WD	708.1171.925.20	L	160	35	1	38.0	17.5	46	50	404
● GEV-35LR 5.4 WD	708.1171.944.20	L	160	35	1 1/4	39.0	17.5	50	50	465
GEV-35LR 3.2 WD	708.1171.950.20	L	160	35	1 1/2	41.0	19.5	55	50	594
GEV-42LR 1.1 WD	708.1171.980.20	L	160	42	1	39.0	16.0	55	60	558
GEV-42LR 5.4 WD	708.1171.985.20	L	160	42	1 1/4	40.0	19.0	55	60	626
● GEV-42LR 3.2 WD	708.1171.992.20	L	160	42	1 1/2	42.0	19.0	55	60	610

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.

Abdichtung durch Profildichtung FPM.

Sealing by capture FPM seal.

Cierre hermético mediante junta con perfil FPM.



# LEHENGOMAK, S. A.