




LEHENGOK, S.A.


**INTERCAMBIADOR ACEITE AIRE / CAPACIDAD 15-80 Lts / MATERIAL ALUMINIO/
PRESIÓN MÁXIMA 26 BAR MODELO 20/2**

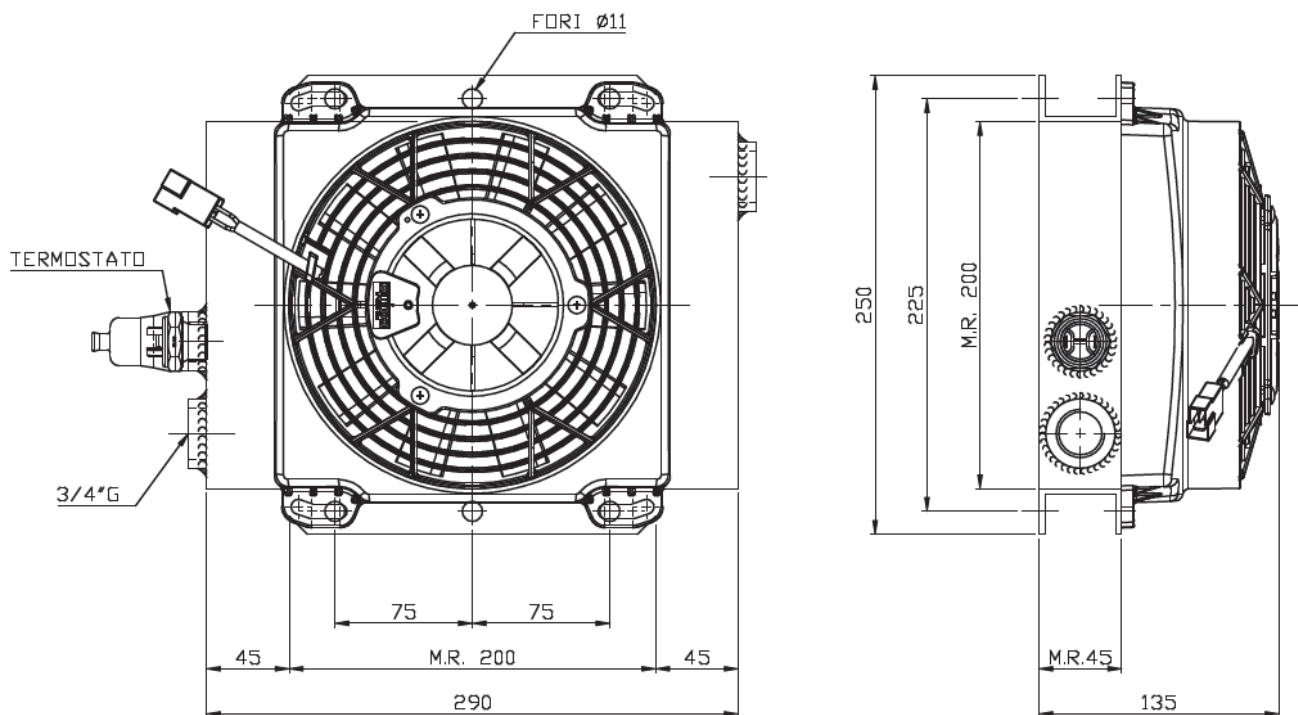


CARACTERÍSTICAS TÉCNICAS

Tensione/Voltage	Assorbimento/Current	Portata aria/Air flow	Protezione/Protection	Ø
V	A	m³/h	IP	mm
12	5.2	630	68	190
24	2.6	630	68	190
230 Hz 50/60	0.30/0.34	890/990	44	200
230/400 Hz 50/60	0.17/0.13	890/990	44	200

CURVA PÉRDIDA DE CARGA

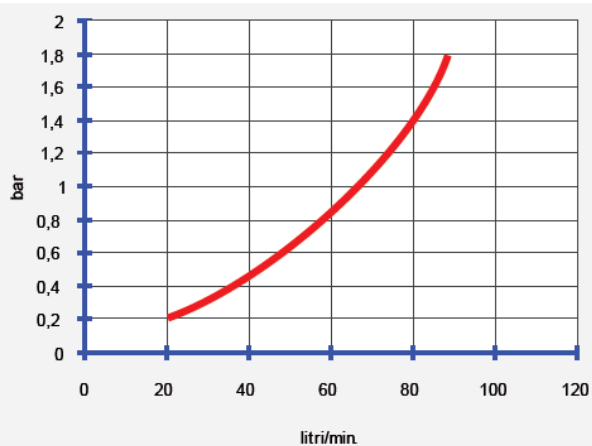

CURVA DE RENDIMENTO

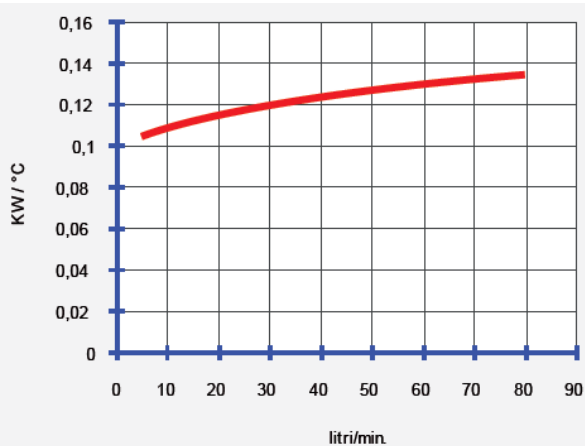


LEHENGOK, S.A.



LEHENGOK, S.A.


INTERCAMBIADOR ACEITE AIRE / CAPACIDAD 10-120 Lts / MATERIAL ALUMINIO/
PRESIÓN MÁXIMA 26 BAR MODELO 30/2

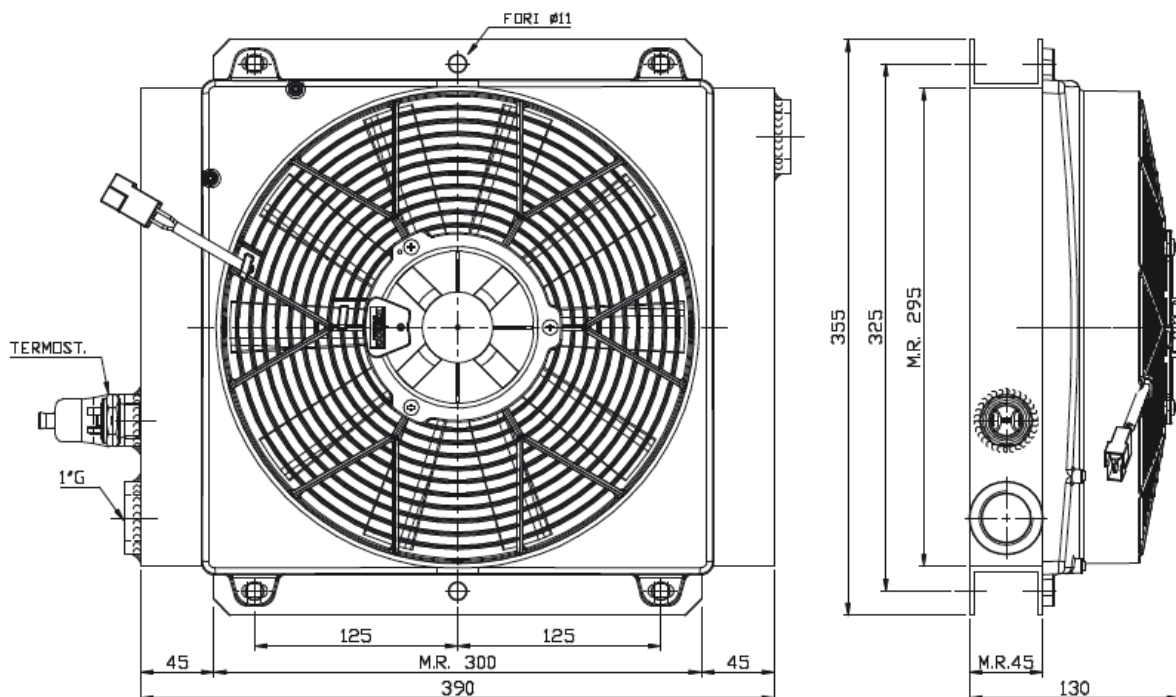


CARACTERÍSTICAS TÉCNICAS

Tensione/Voltage	Assorbimento/Current	Portata aria/Air flow	Protezione/Protection	Ø
V	A	m ³ /h	IP	mm
12	8	1260	67	280
24	4	1240	67	280
230 Hz 50/60	0.53/0.70	1815/1865	44	250
230/400 Hz 50/60	0.20/0.24	1730/1810	44	250

CURVA PÉRDIDA DE CARGA

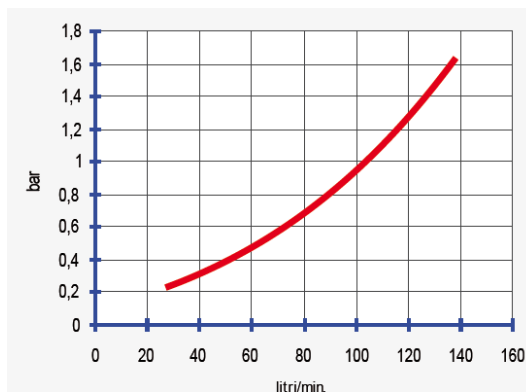

CURVA DE RENDIMENTO

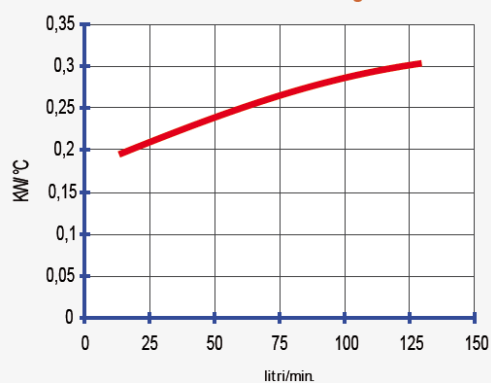

LEHENGOK, S.A.